



## GS1200-5HP v2/GS1200-8HP v2

### 5-Port/8-Port Web Managed PoE Gigabit Switch

The Zyxel GS1200-5HP v2/GS1200-8HP v2 is equipped with 5 or 8 Gigabit ports includes 4 PoE ports compliance with IEEE 802.3at and automatically detect and supply power up to 60W total PoE budget.

However, the Zyxel GS1200-5HP v2/GS1200-8HP v2 is more than just a typical PoE switch. It comes with an easy-to-use web configuration to prioritize, limit and/or protect network traffics. It has been designed specifically for customers who require simple control functions for office network management.



60 Watts of total output on 4 Gigabit PoE ports



Link aggregation increases bandwidth between 2 Ethernet ports



Quality of Service for better traffic control



Multicast IGMP snooping v1/v2 and v3 compatible for streaming applications



Virtual LAN for enhanced network security



Easy web management



Advanced energy-savings at work

## Benefits

### Smart PoE+ 802.3af/802.3at support

The GS1200 series supports the IEEE 802.3at standard, providing a maximum of 30 watts per port (with a max total power budget of 60 watts) to supply power to PoE network devices like wireless APs, IP cameras and VoIP phones. Web GUI management enables you to monitor the power status on each port and/or reboot the network devices, as needed.



### Quality of Service

Port-based Quality of Service for better voice and video traffic control. Optimizing access bandwidth on the network.



### Link aggregation

Increases bigger bandwidth between 2 Ethernet ports to support aggregated uplink/downlink traffic.



### VLAN

Segregating network into small groups for enhanced network security and efficiency





### IGMP snooping

Optimizing network efficiency on multicast traffic delivery without the need of an extra multicast router.



# Specifications

Model	GS1200-5HP v2	GS1200-8HP v2	
<b>Product name</b>	5-Port GbE Web Managed PoE Switch	8-Port GbE Web Managed PoE Switch	
			
<b>Port Density</b>			
<b>Total port count</b>	5	8	
<b>1000BASE-T</b>	1	4	
<b>1000BASE-T PoE</b>	4	4	
<b>Performance</b>			
<b>Switching capacity</b>	10 Gbps	16 Gbps	
<b>Packet buffer</b>	128 KB	192 KB	
<b>MAC address</b>	2K	4K	
<b>Jumbo frame</b>	9 KB	9 KB	
<b>LED</b>			
<b>Power</b>	Yes	Yes	
<b>Per port</b>	Yes	Yes	
<b>PoE power status</b>	Yes (Max)	Yes (Max)	
<b>Power</b>			
<b>Input voltage</b>	55 V / 1.3 A	55 V / 1.3 A	
<b>Power supply</b>	External	External	
<b>Maximum power consumption (watt)</b>	72	72	
<b>PoE power budget (watt)</b>	60	60	
<b>Physical Specifications</b>			
<b>Item</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	193 x 84 x 26/7.60 x 3.31 x 1.02	240 x 105 x 26/9.45 x 4.13 x 1.02
	<b>Weight (g/lb.)</b>	392/0.86	584/1.29
<b>Packing</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	210 x 132 x 78/8.26 x 5.20 x 3.07	256 x 132 x 78/10.08 x 5.20 x 3.07
	<b>Weight (g/lb.)</b>	950/2.10	1,153/2.54
<b>Environmental Specifications</b>			
<b>Operating environment</b>	<b>Temperature</b>	0°C to 40°C/32°F to 104°F	0°C to 40°C/32°F to 104°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-40°C to 70°C/-40°F to 158°F	-40°C to 70°C/-40°F to 158°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)

## Standard Compliance

- IEEE 802.3u 100BASE-TX Ethernet
- IEEE 802.3ab 1000BASE-T Ethernet
- IEEE 802.3az EEE support
- IEEE 802.3x flow control
- IEEE 802.3z 1000BASE-X
- IEEE 802.1p CoS
- IEEE 802.3af PoE
- IEEE 802.3at PoE Plus (30W per port)
- Auto MDI/MDI-X
- IEEE 802.1Q VLAN tagging

## Features

- Web-based management
- System password
- VLAN (Port supported)
  - GS1200-5HP v2: 5 ports
  - GS1200-8HP v2: 8 ports

- Port-based QoS
- 802.1p CoS
- Broadcast storm control
- Loop detection/prevention
- DHCP client
- Link aggregation
  - GS1200-5HP v2: one LAG (Port 3&4)
  - GS1200-8HP v2: two LAGs (Port 3&4, Port 7&8)
- Port mirroring
- Weighted Round Robin (WRR) priority QoS
- IGMP snooping v1/v2/and v3 compatible
- Supported multicast groups: 128
- Firmware update


## Certification

- Safety: CE-LVD, BSMI
- EMC: CE, FCC, BSMI, Class B

## Package Contents

- Switch
- Power adapter
- Power cord
- Quick start guide
- Safety warning and DoC
- Rubber foot pads

# Application Diagram

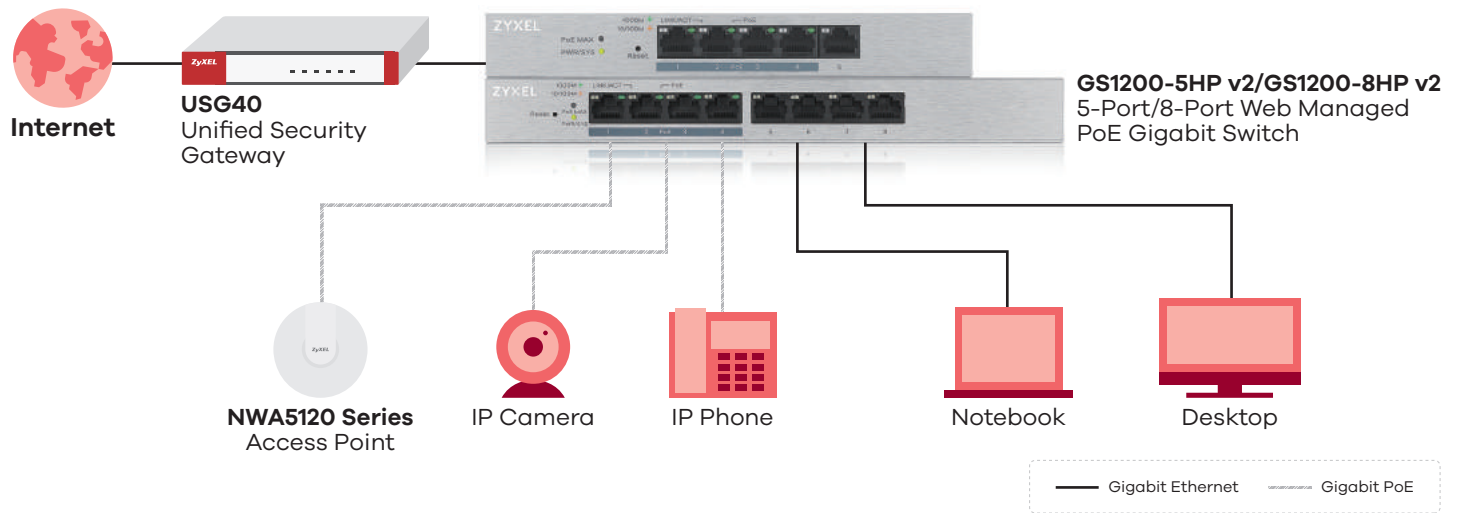

# Easy Web-based Management Interface

## System




## Port



## VLAN



## Management

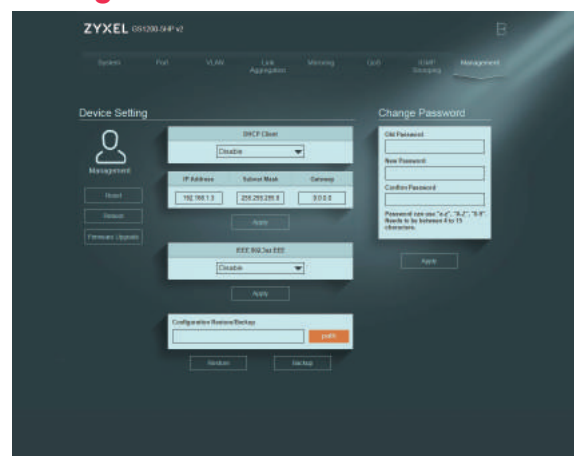

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2018 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet [GS1200-5HP v2/GS1200-8HP v2](#)



5-100-01018005 04/18